

# *H-Star Endmill*

## Endmill for high hardness steel cutting

- Stable cutting from high hardness substrate and exclusive new coating layer with good wear resistance application
- Improved initial chipping resistance with optimized edge treatment for high hardness steel cutting



## Endmill for high hardness steel cutting

# H-Star Endmill

High hardness heat treated workpiece (HRC50~63) used for automobile, mold and general industries has features like high hardness, outstanding durability and excellent wear resistance.

Those features occur severe impact on the cutting edge so it makes hard to apply high speed cutting due to frequent chipping and fracture.

The **H-Star Endmill** improved wear resistance applying ultra-fine substrate and newly developed AlTiSiN coating layer which also ensures stability in cutting from frictional heat. In addition, the optimal cutting edge shape and special treatment on it improve chipping resistance in the beginning of cutting and realize stable cutting.

KORLOY recommends H-Star Endmill which is the optimal tool for high hardness heat treated workpiece machining to improve our customers' productivity.

» **Good wear resistance and heat resistance**

- Ultra-fine substrate and new coating layer

» **Good chipping resistance**

- Optimal cutting edge and special treatment on it

» **High precise measurement**

- Tight precision tolerance applied on tool diameter and radius

» **Various line-ups**

- Normal/rib type and neck type shape



## Code system

ES	R	7	0	4	100	15	32	10
H-Star Endmill	Type	Grade 7: Grade	Length/ shank type	No. of flute 2: 2 flutes 3: 3 flutes 4: 4 flutes 6: 6 flutes	Tool dia. 010: Ø1.0 mm 060: Ø6.0 mm 065: Ø6.5 mm 100: Ø10.0 mm	Corner R 05: 0.5 mm 15: 1.5 mm 20: 2.0 mm	Effective length 10: 10 mm 12: 12 mm 32: 32 mm	Shank dia. 6: Ø6 mm 10: Ø10 mm 12: Ø12 mm

B: Ball E: Flat R: Radius XE: Flat (irregular flute spacing) XR: Radius (irregular flute spacing) PM: Power mill RB: Rib ball RE: Rib flat RR: Rib radius LNB: Long neck ball TNB: Taper neck ball LNS: Long neck flat LNR: Long neck radius	0: Neck 1: Straight, neck 2: Long shank neck 3: Long shank 4: Helix 35°
--	---


## Features

- **High hardness coating layer** - Ensuring stable cutting from high Si content, increased wear resistance and frictional heat resistance due to applying a new AlTiSiN series coating layer
- **High hardness substrate** - Containing ultra-fine WC + Co 9% and expanded general application range by maximizing cutting edge feature
- **Edge treatment** - Increased chipping resistance in the beginning of high hardness steel cutting and enhanced wear resistance lead to stable cutting



**High hardness substrate**

- Ultra-fine WC+Co 9%
- Expanded general application range by maximizing cutting edge feature






**High hardness coating layer**

- High Si content
- Enhanced wear resistance
- Stable cutting through frictional heat resistance increase


**Edge treatment**

- Enhancing chipping resistance in the beginning of high hardness steel cutting
- Increased wear resistance and stable cutting performance

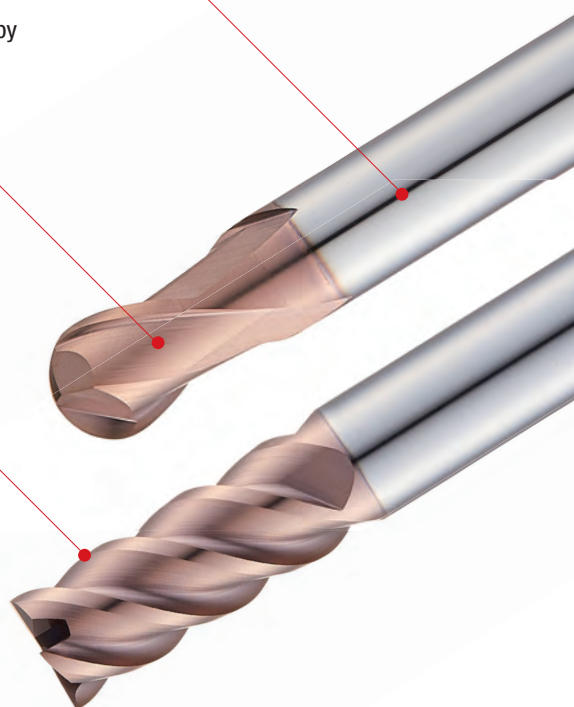

## ✓ Tool selection guide

\*: 1<sup>st</sup> recommendation

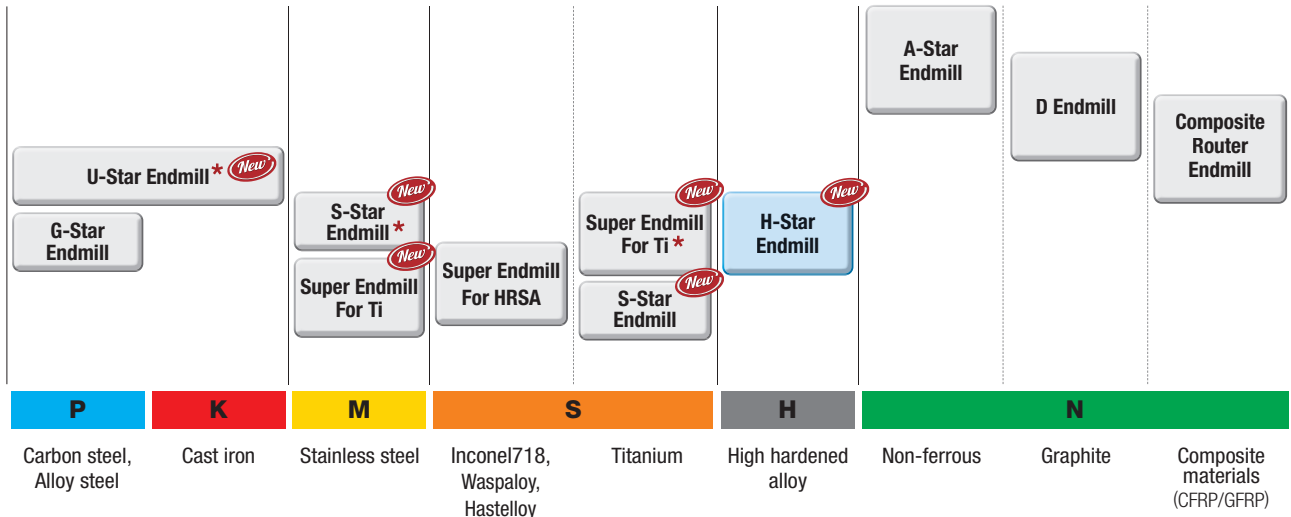

### • Applicable workpiece

◎: Excellent ○: Good

Carbon steel (~ HB225)	Alloy steel (HB225 ~ 325)	Pre-hardened steel (HRC30 ~ 50)	Hardened steel		Copper	Graphite	Cast iron ~ FCD500	Aluminum	Stainless steel
			SKD61 (~ HRC55)	SKD11 (HRC55 ~)					
		○	◎	◎	○				

## ✓ Application examples

### Hardened steel (STD61, HRC50~55)




**Cutting conditions**  $vc(m/min) = 130$ ,  $fz(mm/t) = 0.06$ ,  $ap(mm) = 12$ ,  $ae(mm) = 0.4$ , dry

**Tool** ESB712120 (Diameter =  $\varnothing 12$  mm)



[ H-Star Endmill ]

[ Competitor ]

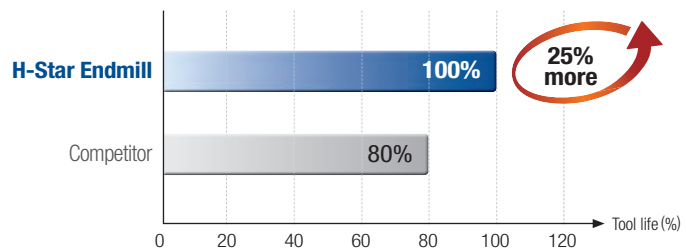


### Hardened steel (STD11, HRC60~63)




**Cutting conditions**  $vc(m/min) = 70$ ,  $fz(mm/t) = 0.04$ ,  $ap(mm) = 12$ ,  $ae(mm) = 0.4$ , dry

**Tool** ESE714120 (Diameter =  $\varnothing 12$  mm)

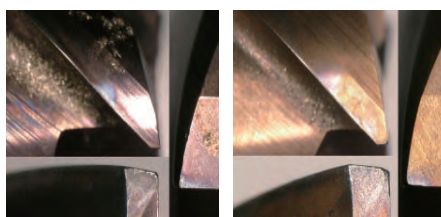

[ H-Star Endmill ]

[ Competitor ]

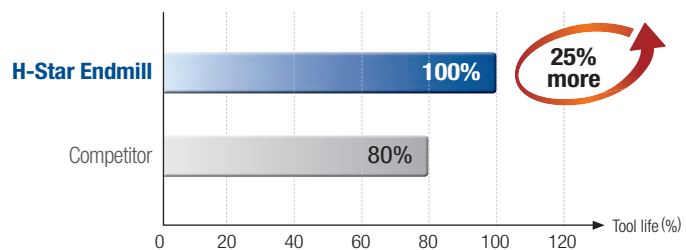




## Application examples

### Hardened steel (STD61, HRC50~55)




**Cutting conditions**  $vc(m/min) = 200, fz(mm/t) = 0.15, ap(mm) = 0.5, ae(mm) = 0.5, dry$


**Tool** ESB702101 (Diameter =  $\varnothing 10$  mm)



[ H-Star Endmill ]



[ Competitor ]

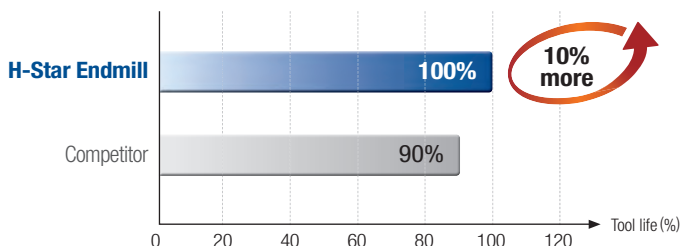


### Hardened steel (STD11, HRC55~60)




**Cutting conditions**  $vc(m/min) = 70, fz(mm/t) = 0.1, ap(mm) = 10, ae(mm) = 0.3, dry$


**Tool** ESXR7041001032 (Diameter =  $\varnothing 10$  mm)



[ H-Star Endmill ]



[ Competitor ]

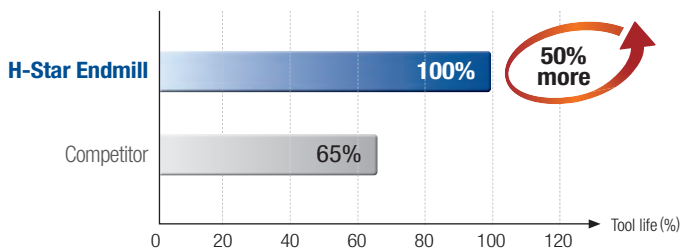


### Hardened steel (SKH51, HRC60~63)



**Cutting conditions**  $vc(m/min) = 73, fz(mm/t) = 0.08, ap(mm) = 0.083, ae(mm) = 0.083, wet$


**Tool** ESB702015S4 (Diameter =  $\varnothing 1.5$  mm)



[ H-Star Endmill ]



[ Competitor ]

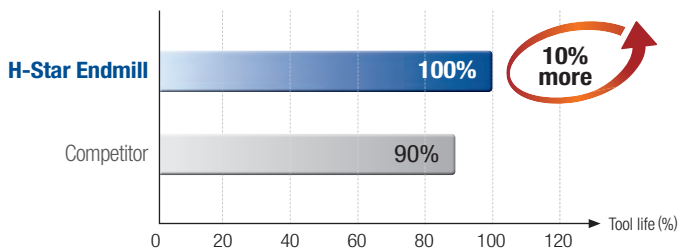


### Hardened steel (STD61, HRC48~50)




**Cutting conditions**  $vc(m/min) = 250, fz(mm/t) = 0.15, ap(mm) = 0.15, ae(mm) = 0.15, wet$


**Tool** ESB702100 (Diameter =  $\varnothing 10$  mm)









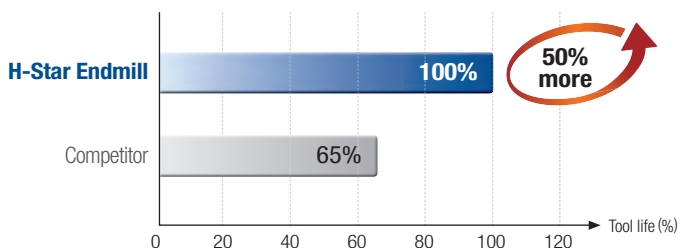















[ H-Star Endmill ]













[ Competitor ]



## Line-up

Type	Designations	Grade	Picture	Product name	No. of flute	Size (Ø)	
						Min	Max
Ball	ESB702	PC305H		2 flutes neck type ball Endmill	2	1.0	12.0
	ESB712	PC305H		2 flutes ball Endmill	2	1.0	12.0
	ESB703	PC305H		3 flutes neck type ball Endmill	3	2.0	12.0
	ESB734	PC305H		4 flutes 15° helix ball Endmill	4	2.0	10.0
Flat	ESE702	PC305H		2 flutes neck type flat Endmill	2	0.1	20.0
	ESE712	PC305H		2 flutes flat Endmill	2	1.0	6.0
	ESE704	PC305H		4 flutes neck type flat Endmill	4	1.0	20.0
	ESE714	PC305H		4 flutes high helix flat Endmill	4	1.0	12.0
	ESE724(6)	PC305H		4 & 6 flutes high helix flat Endmill	4/6	1.0	12.0
	ESE744	PC305H		4 flutes 35° helix flat Endmill	4	1.0	12.0
	ESE716	PC305H		6 flutes high helix flat Endmill	6	6.0	20.0
Radius	ESR702	PC305H		2 flutes neck type radius Endmill	2	1.0	12.0
	ESR732	PC305H		2 flutes long shank radius Endmill	2	1.0	12.0
	ESR704	PC305H		4 flutes neck type radius Endmill	4	1.0	12.0
	ESR714	PC305H		4 flutes radius Endmill	4	3.0	12.0
	ESR724	PC305H		4 flutes neck type radius Endmill	4	6.0	12.0
	ESR734	PC305H		4 flutes long shank radius Endmill	4	1.0	12.0
	ESR706	PC305H		6 flutes neck type radius Endmill	6	6.0	12.0
	ESR736	PC305H		6 flutes radius Endmill	6	6.0	12.0
Rib ball	ESRB712	PC305H		2 flutes rib ball Endmill	2	0.1	12.0
Rib flat	ESRE712	PC305H		2 flutes rib flat Endmill	2	0.1	12.0
	ESRE714	PC305H		4 flutes rib flat Endmill	4	0.5	12.0

 **Line-up**


Type	Designations	Grade	Picture	Product name	No. of flute	Size (Ø)	
						Min	Max
Rib radius	<b>ESRR712</b>	PC305H		2 flutes rib radius Endmill	2	0.2	16.0
	<b>ESRR714</b>	PC305H		4 flutes rib radius Endmill	4	0.5	2.0
Flat	<b>ESXE704</b>	PC305H		4 flutes neck type flat Endmill	4	1.0	12.0
	<b>ESXE714</b>	PC305H		4 flutes flat Endmill	4	2.0	12.0
Radius	<b>ESXR704</b>	PC305H		4 flutes neck type radius Endmill	4	1.0	12.0
Rib ball	<b>ESLNB20</b>	PC305H		2 flutes long neck ball Endmill	2	1.0	5.0
	<b>ESTNB20</b>	PC305H		2 flutes taper neck ball Endmill	2	0.2	10.0
	<b>ESTNB30</b>	PC305H		3 flutes taper neck ball Endmill	3	2.0	5.0
Rib flat	<b>ESLNS20</b>	PC305H		2 flutes long neck flat Endmill	2	0.1	5.0
	<b>ESLNS40</b>	PC305H		4 flutes long neck flat Endmill	4	1.0	5.0
Rib radius	<b>ESLNR</b>	PC305H		2 flutes long neck radius Endmill	2	0.2	3.0
	<b>ESTNR</b>	PC305H		2 flutes taper neck radius Endmill	2	0.2	3.0
High feed	<b>ESPM4</b>	PC305H		4 flutes neck type radius Endmill	4	3.0	12.0

### ⚠ For the safe metalcutting

- Use safety supplies such as protective gloves to prevent possible injury while touching the edge of tools.
- Use safety glasses or safety cover to hedge possible dangers. Inappropriate usage or excessive cutting condition may lead tool's breakage or even the fragment's scattering.
- Clamp the workpiece tightly enough to prevent its movement while its machining.
- Properly manage the tool change phase because the inordinately used tool can be easily broken under the excessive cutting load or severe wear, and it may threat the operator's safety.
- Use safety cover because chips evacuated during cutting are hot and sharp and may cause burns and cuts. To remove chips safely, stop machining, put on protective gloves, and use a hook or other tools.
- Prepare for fire prevention measures as the use of the non-water soluble cutting oil may cause fire.
- Use safety cover and other safety supplies because the spare parts or the inserts can be pulled out due to centrifugal force while high speed machining.



**Head Office:** Holystar B/D, 326, Seocho-daero, Seocho-gu, Seoul, 06633, Republic of Korea  
Tel: +82-2-522-3181 Fax: +82-2-522-3184, +82-2-3474-4744 Web: [www.korloy.com](http://www.korloy.com) E-mail: [sales.khq@korloy.com](mailto:sales.khq@korloy.com)

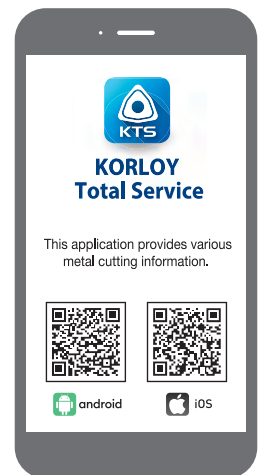

### **KORLOY AMERICA**

620 Maple Avenue, Torrance, CA 90503, USA  
Tel: +1-310-782-3800 Toll Free: +1-888-711-0001 Fax: +1-310-782-3885  
E-mail: [sales.kai@korloy.com](mailto:sales.kai@korloy.com)

### **KORLOY INDIA**

Plot No. 415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, India  
Tel: +91-124-4391790 Fax: +91-124-4050032  
E-mail: [sales.kip@korloy.com](mailto:sales.kip@korloy.com)

### **KORLOY TURKIYE**

Serifali Mahallesi, Burhan Sokak NO: 34  
Dudullu OSB/Umraniye/Istanbul, 34775, Turkiye  
Tel: +90-216-415-8874 E-mail: [sales.ktl@korloy.com](mailto:sales.ktl@korloy.com)

### **KORLOY RUSSIA**

Krasivy Dom office No. 305, Bld. 5, Novovladykinskiy proezd 8, 127106,  
Moscow, Russia  
Tel: +7-495-280-1458 Fax: +7-495-280-1459 E-mail: [sales.krc@korloy.com](mailto:sales.krc@korloy.com)

### **KORLOY FACTORY INDIA**

Plot No. 415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, India  
Tel: +91-124-4391790 Fax: +91-124-4050032  
E-mail: [pro.kim@korloy.com](mailto:pro.kim@korloy.com)

### **KORLOY EUROPE**

Gablonzer Str. 25-27, 61440 Oberursel, Germany  
Tel: +49-6171-277-83-0 Fax: +49-6171-277-83-59  
E-mail: [sales.keg@korloy.com](mailto:sales.keg@korloy.com)

### **KORLOY BRASIL**

Av. Aruana 280, conj.12, WLC, Alphaville, Barueri,  
CEP06460-010, SP, Brasil  
Tel: +55-11-4193-3810 E-mail: [sales.kbl@korloy.com](mailto:sales.kbl@korloy.com)

### **KORLOY CHILE**

Av. Providencia 1650, Office 1009, 7500027  
Providencia-Santiago, Chile  
Tel: +56-229-295-490 E-mail: [sales.kcs@korloy.com](mailto:sales.kcs@korloy.com)

### **KORLOY MEXICO**

Calle R. M. Clemencia Borja Taboada 522, Jurica Acueducto,  
76230 Juriquilla, Qro., Mexico  
Tel: +52-442-673-7388 E-mail: [sales.kml@korloy.com](mailto:sales.kml@korloy.com)

