

Tangen-Pro **TP2P**



Tangential Shoulder Milling Tool

This milling tool series with its tangential clamping system increases stable machining and productivity, while improving perpendicularity

- **Superior Clamping Stability**

The tangential clamping system enables high speed and high feed machining with its wedge-shaped inserts

- **Improved Perpendicularity**

A high quality milling tool and optimized blade design improves surface finish and perpendicularity

- **Higher Productivity**

High speed and high feed machining result in an exceptional chip removal rate per minute



Tangential Shoulder Milling Tool **Tangen-Pro TP2P**



Insert



Shank





Cutter

The accelerated development of industrial structures have complicated the forming of the workpiece shapes more than ever before. The clamping area for a jig or a vise becomes narrow and leads to tool vibration and imperfect machining conditions. Workpiece materials are also evolving to hard-to-cut materials and high hardness in order to achieve higher durability for industrial components. This is often said to be the major cause of shortened tool life and unexpected tool breakage in many modern metal cutting applications. So companies dealing with unstable workpiece clamping and hard-to-cut materials have growing demands for cutting tools that are able to solve these problems.

TP2P responds to these demands by using the tangential clamping system and wedge-shaped inserts to improve the clamping stability of the tool itself. Therefore; Unstable clamping of the workpiece can be off-set by a strong clamping force of the tool. In addition, a sharp chip breaker and high helix angle were applied to the insert design for stable cutting performance in hard-to-cut materials and high hardened workpieces. These design details lead to exceptional increases in tool life.

Additionally, the tangential-type clamping system facilitates securing chip pockets and enables multiple-corner use to boost productivity. TP2P features low force cutting performance even at high speeds and high feeds thanks to its optimized blade design that effectively reduces vibration and cutting resistance during operations. Now productivity can be improved over non-tangential designs by more than 30% due to increases in table feeds, stable clamping, and high speed/high feed rates. The Tangen-Pro TP2P shows excellent performance in P, M, K type materials with its specialized design and grades developed specifically for the most challenging metal cutting applications. KORLOY's Tangen-Pro TP2P is one of the most advanced tangential type milling tools available to meet the demand of the industrial market today.

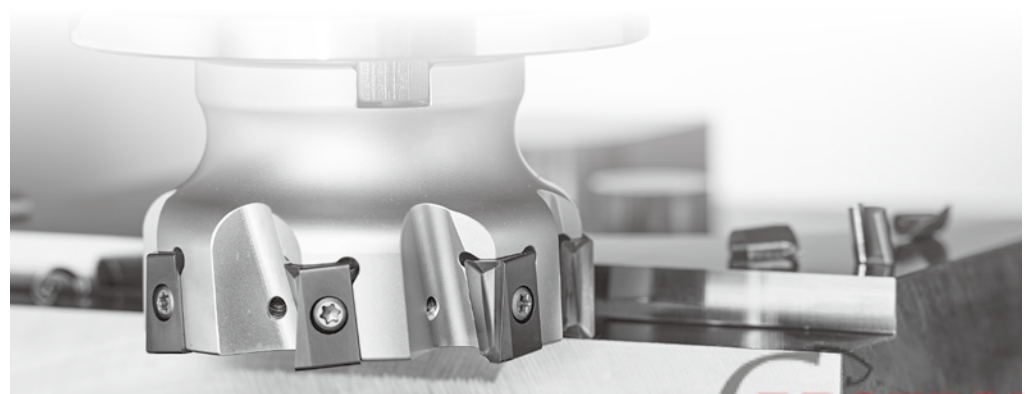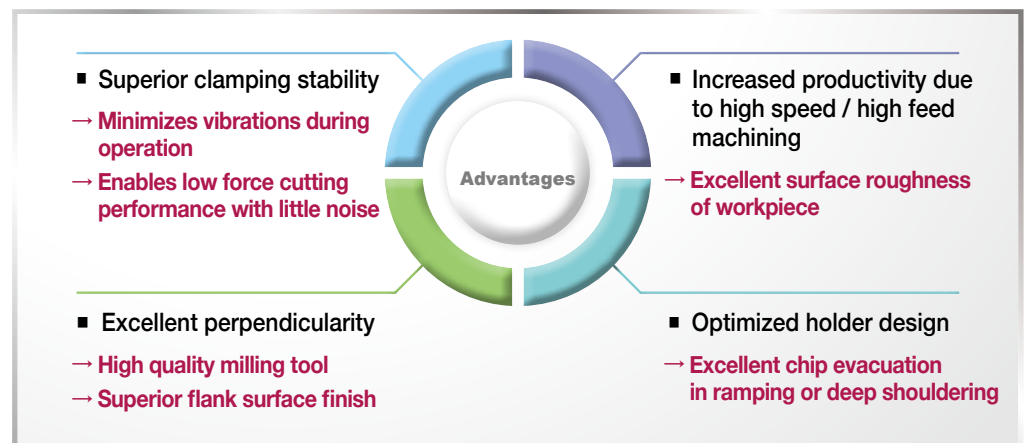

Code System

[Insert]

L	N	K	T	17	07	- 08	P	N	R	- MM
Insert shape L: L type	Tolerance K: K Class		Shape of cross section T: T type	Cutting edge length 17: 17mm	Height of cutting edge 07: 7mm	Nose R 08: R0.8	A.A P: 90°	Relief angle of minor cutting edge N: 0°	Hand R: Right-handed	Chip breaker MM: General cutting ML: Light cutting
Relief angle of major cutting edge N: 0°										

[Shank type]


TP	2	P	S	050	R	- 2	W	32	- 130	- LN17
Tangen-Pro	Approach angle P: 90°	Machining depth 050: Ø50	Oil hole & Hand R: With oil hole, Right-handed NR: Without oil hole, Right-handed	No. of tooth 2: 2 teeth	Shank diameter 032: Ø32	Overall length 130: 130mm	Applicable insert LN17: LNKT17			
No. of corner 2: 2corner	Type S: Shank	Shank type W: Weldon C: Cylinder								

[Cutter type]

TP	2	P	C	M	080	R	- 22	- 7	- LN17
Tangen-Pro	Approach angle P: 90°	Arbor type M: Metric A: Inch None: Asia	Machining depth 080: Ø80	Oil hole & Hand R: With oil hole, Right-handed NR: Without oil hole, Right-handed	No. of tooth 7: 7 teeth	Internal diameter 22: 22mm	Applicable insert LN17: LNKT17		
No. of corner 2: 2corner	Type C: Cutter								


Cutter Features

- Tangential clamping system, wedge-shaped inserts and wide seat area
→ **Higher clamping stability**
→ **Lower vibrations and cutting resistance during machining**
- Optimized H/D design with curved surface for smooth chip flow
→ **Excellent chip evacuation in ramping or deep shouldering**

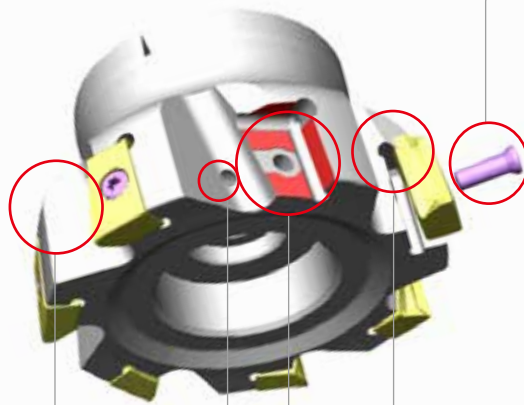


Tangential clamping

- Multi-corner use
→ High feed machining availability




Efficient holder design

- Smoother chip evacuation in slotting or deep shouldering




Through coolant system

- Improved chip evacuation
- Longer tool life due to insert cooling




Wide seat area

- Strong clamping force



Wedge type clamping

- Stable insert life




Tangen-Pro TP2P





Features

- **Clamping stability** gained through tangential clamping system and wedge-shaped inserts
- **Excellent surface finish** nearly perfect perpendicularity, and highly even flank surface compared to competitors designs
- **Improved productivity** due to high rake angles and sharp cutting edges which lead to lower cutting resistance → Ideally suited for high speed and high feed machining

Insert Features

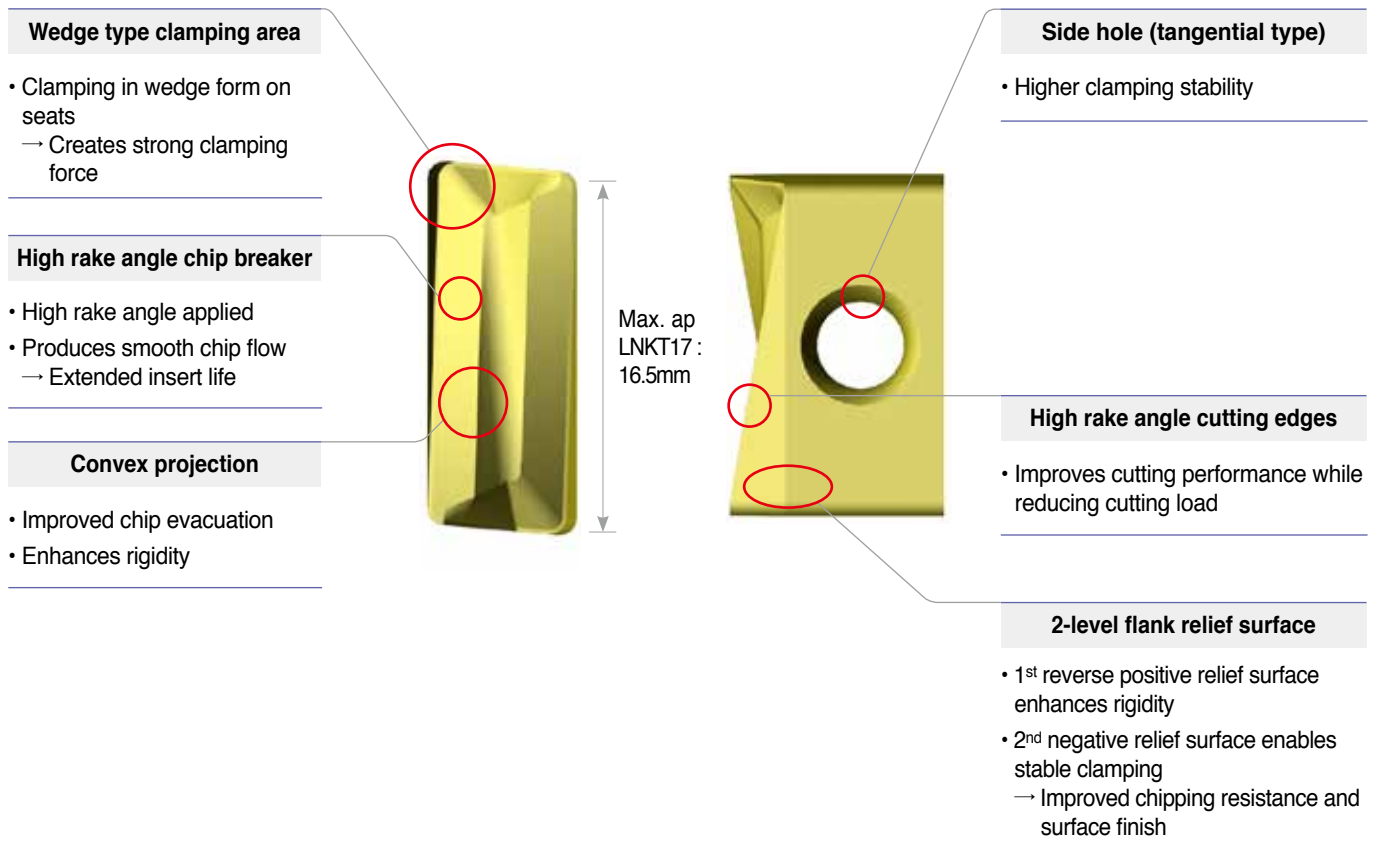

Chip Breaker Features


Chip breaker	Cutting edge shape	Application	Features
<ul style="list-style-type: none"> • Chip breaker ML 		for Light cutting	<ul style="list-style-type: none"> ▪ Chip breaker design for low cutting resistance that provides excellent tool life and quality surface finishes in light cutting and hard-to-cut materials
<ul style="list-style-type: none"> • Chip breaker MM 		for General cutting	<ul style="list-style-type: none"> ▪ Universal design for general shoulder milling operations, highly suitable in most applications



➔ Performance Evaluation

- **Workpiece** 42CrMo4(DIN), SCM440(KS), 4140(AISI), 300(L)x200(W)x100(h), Steel rectangular tube
- **Cutting conditions** $vc(m/min) = 250$, $fz(mm/t) = 0.2$, $ap(mm) = 14$, $ae(mm) = 10$, Dry
- **Machining method** Facing
- **Tools** Insert LNKT170708PNR-MM(PC5300) Holder TP2PCM080R-27-7-LN17



- Stable clamping improves chipping resistance under high speed cutting conditions over $vc(m/min) = 250$
→ **Minimized unexpected tool breakage**
- Optimized cutting edge design
→ **Minimized cutting resistance**

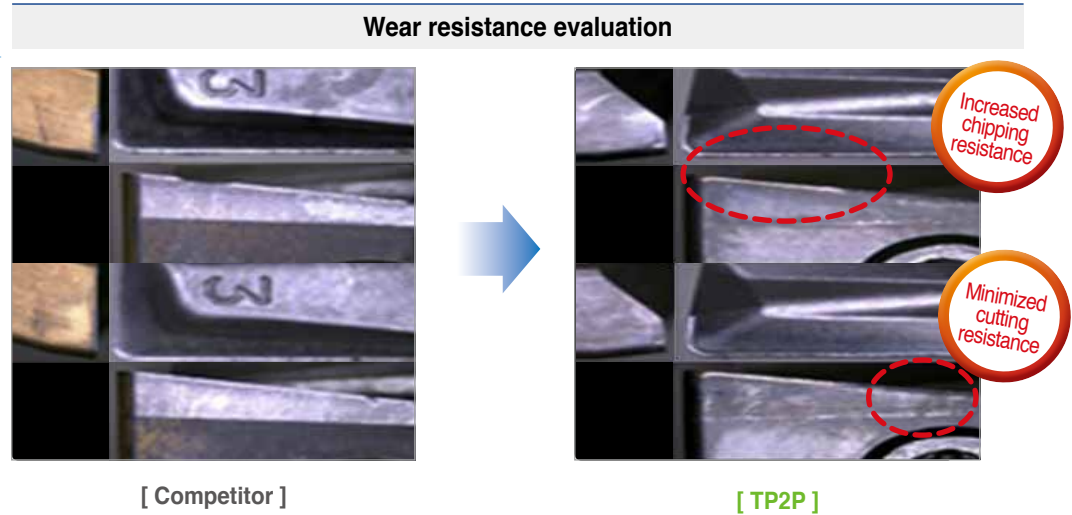

➔ Perpendicularity Evaluation

- **Workpiece** C45(ISO), SM45C(KS), 1045(AISI), 300(L)x200(W)x100(h), Steel rectangular tube
- **Cutting conditions** $vc(m/min) = 150$, $fz(mm/tooth) = 0.15$, $ap(mm) = 15$, $ae(mm) = 5$, Dry
- **Machining method** Multiple passes in depth, measured after three passes of 15mm each, in total 45mm (measurement of perpendicularity and flank surface roughness)
- **Tools** Insert LNKT170708PNR-MM(PC5300) Holder TP2PCM080R-27-7-LN17

Perpendicularity Evaluation

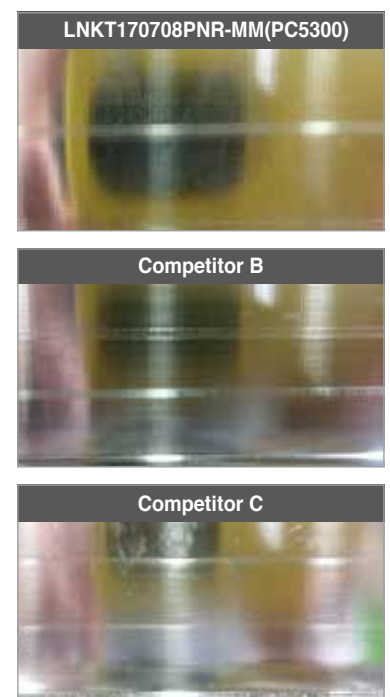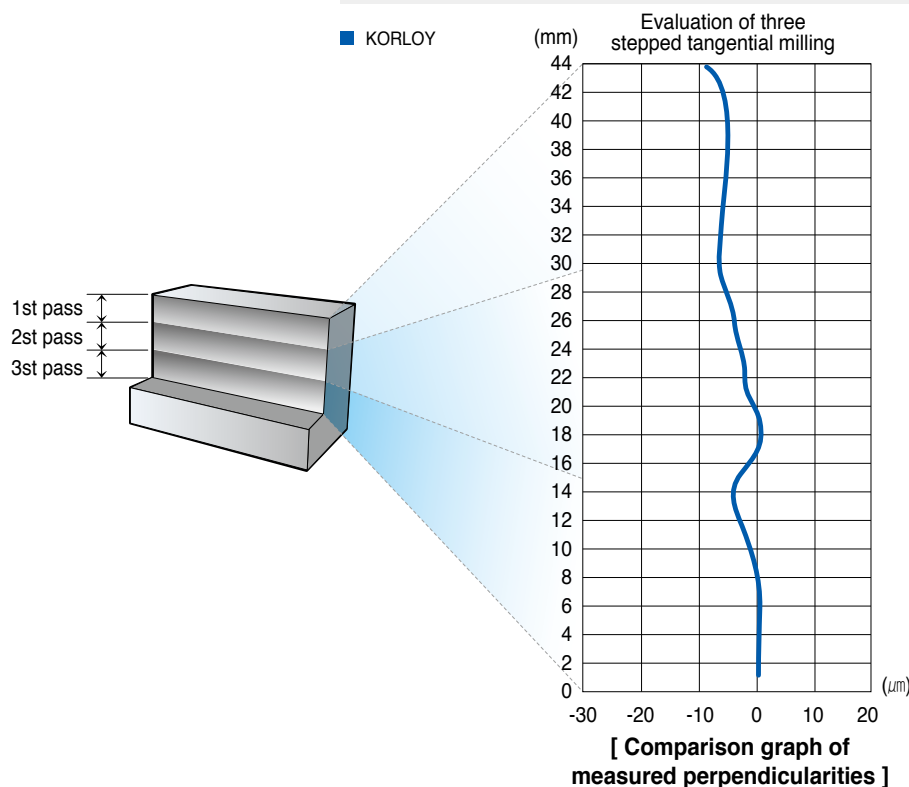

[Comparison pictures of flank surface finish]

Tangen-Pro TP2P

Grade Guideline by Workpiece Type

Cutting conditions		P		K
		Carbon steel	Alloy steel	Cast iron
Grade	High speed cutting	PC5300	PC5300	PC6510
	General cutting	PC5400	PC5300	PC6510
	Interrupted cutting	PC5400	PC5400	PC5300

Recommended Cutting Conditions


Workpiece	Grade	vc (m/min)	fz (mm/t)	Max. ap (mm)	Applicable insert
P Steel	PC5300	150~240	0.25~0.05	16.5	LNKT170708PNR-MM
	PC5400	130~210	0.25~0.05	16.5	
K Cast iron	PC6510	100~250	0.25~0.05	16.5	LNKT170708PNR-ML

* The above data refer to general cutting conditions and can be adjustable to the speed of 300m/min and the feed per tooth of 0.5mm/t depending on user environment.


Application Range

- High speed / high feed capability improves productivity compared to competitors

• ap(mm) = 14, ae(mm) = 10

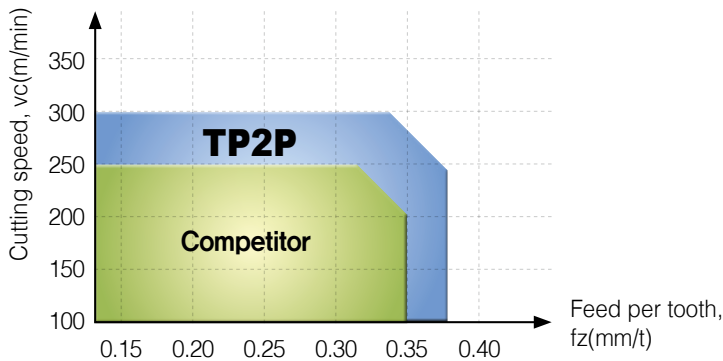



• ap(mm) = 8, ae(mm) = 10

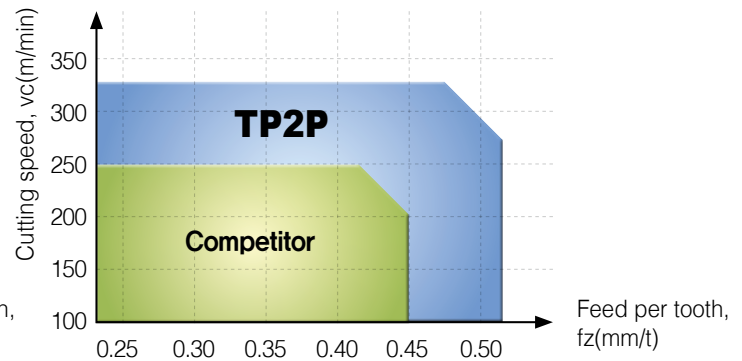

Applicable Insert

Shape	Designation	Dimensions (mm)				Coated			Figure
		d ₁	ℓ	r	Max. ap	PC5300	PC5400	PC6510	
	LNKT 170708PNR-MM	7.0	11.0	0.8	16.5	●	●		
	170708PNR-ML	7.0	11.0	0.8	16.5	●		●	

Cutter



(mm)

Designation			ØD	ØD ₂	Ød	Ød ₁	Ød ₂	Ød ₃	a	b	E	F	ap	
TP2PCM	040R-16-3-LN17	3	40	35	16	9	14	-	8.4	5.6	16	40	16.5	0.17
	040R-16-4-LN17	4	40	35	16	9	14	-	8.4	5.6	16	40	16.5	0.17
	050R-22-4-LN17	4	50	41	22	11	18	-	10.4	6.3	20	40	16.5	0.27
	050R-22-5-LN17	5	50	41	22	11	18	-	10.4	6.3	20	40	16.5	0.26
	063R-22-6-LM17	6	63	49	22	11	18	-	10.4	6.3	20	40	16.5	0.46
	063R-22-7-LM17	7	63	49	22	11	18	-	10.4	6.3	20	40	16.5	0.47
	080R-27-7-LN17	7	80	57	27	14	20	35	12.4	7.0	23	50	16.5	0.89
	080R-27-8-LN17	8	80	57	27	14	20	35	12.4	7.0	23	50	16.5	0.91
	100R-32-8-LN17	8	100	67	32	18	28	45	14.4	8.0	25	63	16.5	1.68
	100R-32-9-LN17	9	100	67	32	18	28	45	14.4	8.0	25	63	16.5	1.75
	125R-40-10-LN17	10	125	90	40	22	32	52	16.4	10.0	30	63	16.5	2.88
	125R-40-11-LN17	11	125	90	40	22	32	52	16.4	10.0	30	63	16.5	2.88
TP2PC	080R-25.4-7-LN17	7	80	57	25.4	14	20	35	9.5	6.0	25	50	16.5	0.92
	080R-25.4-8-LN17	8	80	57	25.4	14	20	35	9.5	6.0	25	50	16.5	0.93
	100R-31.75-8-LN17	8	100	67	31.75	18	28	45	12.7	8.0	32	63	16.5	1.73
	100R-31.75-9-LN17	9	100	67	31.75	18	28	45	12.7	8.0	32	63	16.5	1.73
	125R-38.1-10-LN17	10	125	90	38.1	22	32	52	15.9	9.0	35	63	16.5	3.06
	125R-38.1-11-LN17	11	125	90	38.1	22	32	52	15.9	9.0	35	63	16.5	2.91

Applicable Insert



LNKT-MM



LNKT-ML

Designation	Coated		
	PC5300	PC5400	PC6510
LNKT 170708PNR-MM	●	●	
170708PNR-ML	●		●

Applicable Arbor



Designation	Applicable arbor	
TP2PCM	040R-16-3-LN17	BT□□-FMC16-□□
	040R-16-4-LN17	
	050R-22-4-LN17	
	050R-22-5-LN17	BT□□-FMC22-□□
	063R-22-6-LN17	
	063R-22-7-LN17	
	080R-27-7-LN17	BT□□-FMC27-□□
	080R-27-8-LN17	
	100R-32-8-LN17	BT□□-FMC32-□□
	100R-32-9-LN17	
	125R-40-10-LN17	BT□□-FMC40-□□
	125R-40-11-LN17	
TP2PC	080R-25.4-7-LN17	BT□□-FMA25.4-□□
	080R-25.4-8-LN17	
	100R-31.75-8-LN17	BT□□-FMA31.75-□□
	100R-31.75-9-LN17	
	125R-38.1-10-LN17	BT□□-FMA38.1-□□
	125R-38.1-11-LN17	

Parts

Specification	Screw 	Wrench
Ø40 ~ Ø125	FTKA0412B	TW15S

Tangen-Pro TP2P

Shank

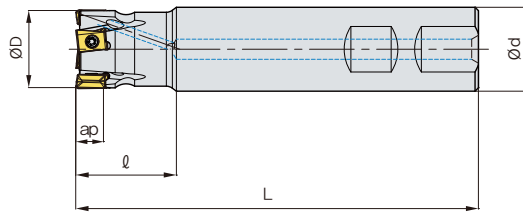

(mm)

Designation			ØD	Ød	l	L	ap	
TP2PS	032R-2W32-130-LN17	2	32	32	40	130	16.5	0.68
	032R-3W32-130-LN17	3	32	32	40	130	16.5	0.67
	040R-3W32-130-LN17	3	40	32	40	130	16.5	0.73
	040R-4W32-130-LN17	4	40	32	40	130	16.5	0.73
	050R-4W32-130-LN17	4	50	32	40	130	16.5	0.83
	050R-5W32-130-LN17	5	50	32	40	130	16.5	0.83

Applicable Insert



LNKT-MM



LNKT-ML

Designation	Coated		
	PC5300	PC5400	PC6510
LNKT 170708PNR-MM	●	●	
170708PNR-ML	●		●

Coating

Specification	Screw 	Wrench
Ø32 ~ Ø50	FTKA0412B	TW15S



Holystar B/D, 1350, Nambusunhwan-ro, Geumcheon-gu, Seoul, 08536, Korea
Tel : +82-2-522-3181 Fax : +82-2-522-3184, +82-2-3474-4744 Web : www.korloy.com E-mail : export@korloy.com



620 Maple Avenue, Torrance, CA 90503, USA
Tel : +1-310-782-3800 Toll Free : +1-888-711-0001 Fax : +1-310-782-3885
www.korloyamerica.com E-mail : sales@korloy.us



Plot NO.415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, INDIA
Tel : +91-124-4391790 Fax : +91-124-4050032
www.korloyindia.com E-mail : sales.kip@korloy.com



Gablonz Str. 25-27, 61440 Oberursel, Germany
Tel : +49-6171-277-83-0 Fax : +49-6171-277-83-59
www.korloyeurope.com E-mail : sales@korloyeurope.com



Av. Aruana 280, conj.12, WLC, Alphaville, Barueri,
CEP06460-010, SP, Brasil
Tel : +55-11-4193-3810 E-mail : vendas@korloy.com



TN55-EM-01 / 20170510